



Model DPX-19804.1

Prime power	kva	65
	kw	52
Standby power	kva	73
	kw	58
Rated voltage line to line	V	230/400
Rated current	A	93,6
Maximun sound level	dB@7m	72

Engine-Perkins

Model		1104A-44TG1
Aspiration		Four-stroke, water-cooled, In line, Turbo charged
Fuel system		Direct injection
No. cylinders		4
Displacement	L	4,4
Bore*Stroke	mm	105x127
Compression ratio		17.25:1
Rated speed	r/min	1500
Governor		mechanical
Engine size	mm	1241x629x951
Engine wet weight	kg	463
Fire order		1-3-4-2
Start Motor	V	12
Rotation		Anti-clockwise, viewed on the flyweel

Air inlet

Air inlet	mounted air filter
-----------	--------------------

Fuel system

mechanical governor	cassette type fuel pump
fuel filter	split element type

Fuel System

110% load(Standby power)	L/h	16,2
100% load(Prime power)	L/h	14,8
75% load(Prime power)	L/h	11,2
50% load(Prime power)	L/h	8
Fuel capacity for silent genset	L	87
Fuel capacity for open genset	L	87

Lubrication System

Oil capacity	L	8
--------------	---	---

Cooling System

Total coolant capacity	L	13
------------------------	---	----

Standard Features

Engine(Perkins ENGINE)	●
Radiator 50°C max,fans are driven by belt	●
12V charge alternator	●
Alternator: single bearing alternator IP23	●
insulation class H/H	●
Standard auto control system	●
Main line circuit breaker / ACB	●
Base fuel tank	●
12V batteries, rac and cable	●
Exhaust system(Ripple flex exhaust pipe)	●
Exhaust siphon, flange, muffler	●
User manual	●
Battery charge	●

Options

Water heater	○
Alternator heater	○
One set of air filter, fuel filter, oil filter	○
PMG	○
Water oil separator	○
Daily fuel tank	○
Remote control panel	○
Automatic transfer switch/ATS	○
Switch box	○
Standard: ●	Options:○

Alternator

Model		TAL-A42-H
Alternator Brand		Leroy Somer
Phase		3
Voltage	V	230/400
Wiring Type		12 wires
Bearing		1
Power factor		0,8
Frequency	Hz	50
Prime power	KVA	25
Exciter Type		Brushless, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H

Controller-Deepsea

Model

DSE 6120

7 configurable digital inputs

Built-in governor and AVR control

Base load (kW export) functionality

Mains (utility) de-coupling protection

Generator power (kW, kVA) monitoring


Overload (kW & kV Ar) protection

Emergency stop

Start failure



Unit Dimensions(Basic unit)

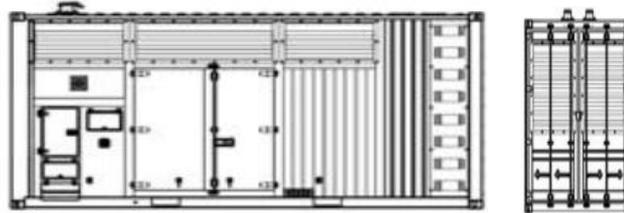

Silent Type

L*W*H

mm

2400x950x1250

Weight

kg

1135

Warranty

Perkins Engine

12 months from date of purchase or 1000 hours.

Generator

12 months from date of purchase or 1000 hours
(whichever comes first).

